


REAR CLEVIS MOUNTED CYLINDERS

A range of cylinders mounted on a welded rear male clevis (sometimes called a Pad-eye), with a male threaded rod-end. These cylinders are made to order on short lead times and can be manufactured up to 5m stroke (customer to specify stroke length).

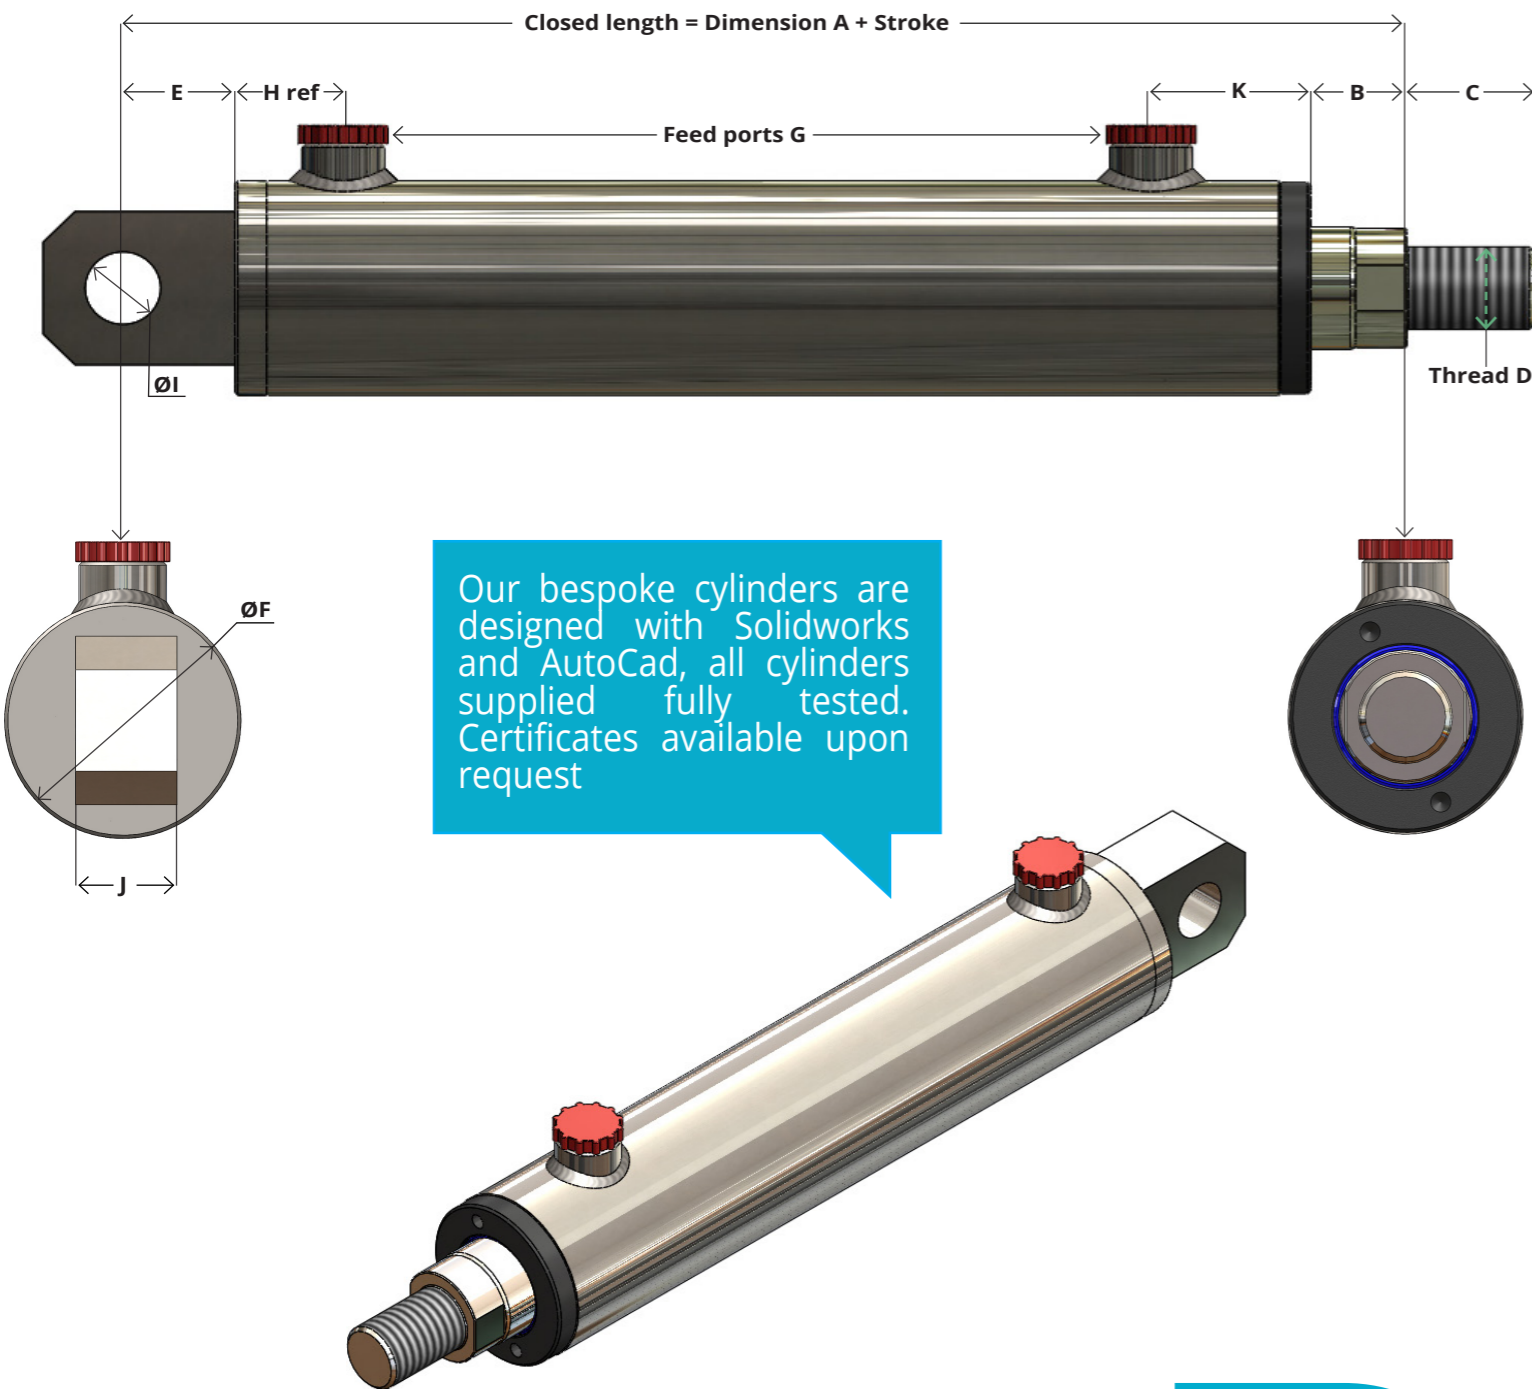

STANDARD CYLINDER DIMENSIONS Can be altered to suit your exact specifications.

Bore DIA	Rod DIA	A	B	C	D	E	F	G	H	I	J	K
40	20	158	25	25	M16X1.5	25	50	1/4" BSP	28	16.20	20	40
	25											
50	25	178	30	25	M16X1.5	30	60	3/8" BSP	30	20.25	25	43
	30			30	M20X1.5							
	35											
60	30	202	30	30	M20X1.5	35	70	3/8" BSP	32	25.25	30	50
	35			35	M24X2.0							
	40			40	M27X2.0							
63	30	202	30	30	M20X1.5	35	73	3/8" BSP	32	25.25	30	50
	35			35	M24X2.0							
	40			40	M27X2.0							
70	35	207	35	30	M24X2.0	35	80	3/8" BSP	35	25.25	30	50
	40			40	M27X2.0							
	50											
80	40	235	35	40	M27X2.0	45	95	1/2" BSP	38	30.25	35	60
	50			45	M33X2.0							
	60											
100	40	267	40	40	M27X2.0	55	115	1/2" BSP	38	35.25	40	82
	50	280		45	M33X2.0							
	60											
	70			50	M39X2.0							

Maximum working pressure 210 bar.
 Test pressure 300 bar unless otherwise stated.
 All cylinders can be used as Double Acting OR Single Acting pull / Single Acting push. Cylinders can be supplied with sintered bronze breathers fitted to ports for single acting applications.
 Cylinder material: ST52.3 DOM and CDS tube DIN2393 I.S.O. H8 & H9.
 Rod material: Standard Grade EN8 DIN UNI CK45, Hard Chrome Plated, minimum 25 microns. Alternative rod materials available: Chrome plated Stainless Steel grades 431S29T / 316 / 304; NIKROM 350
 Headbush material: Cast Iron - UNI5007-G25 unless otherwise stated.
 Bore diameters available from 25mm to 250mm.
 350 bar Heavy Duty range of cylinders and alternative rod and bore combinations available.
 Data given illustrates standard sizes.
 Bespoke manufacturing options are always available, call or email for further details.
 All data is given in good faith but without responsibility and may be subject to change without notice, all dimensions in mm

Interfluid Hydraulics Ltd
 Beeching Park
 Kelly Bray
 Callington
 Cornwall
 PL17 8QS

Tel: +44 (0) 1822 833111
 Fax: +44 (0) 1822 833397
 Email: sales@interfluid.co.uk
 Web: interfluid.co.uk

Download



Scan the code above

Any Questions ?

If you would like more information, technical assistance or to place an order please, Call us on +44 (0) 1822 833111 or e-mail sales@interfluid.co.uk